



**ULTIMATRON
FRANCE**



- ▶ Emergency relief
- ▶ Traveling by car
- ▶ Outdoor camping
- ▶ Home appliance
- ▶ Drone



Long battery life, meet your needs
of internal and external scenes



The same current as the mains does not
damages electrical equipment




Multiple sockets can power various
electrical devices



UL certified Class A cell to ensure the
power safety



The power status is clear at a glance

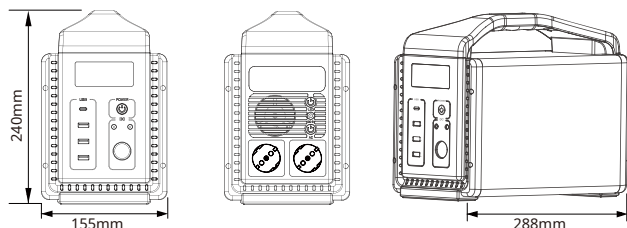

Nominal capacity	560Wh(14.4V/ 39Ah)
Materials	Aluminum alloy+ABS+PC
Weight	7kg
Dimensions	288×155×240mm

DC output	1*USB-C	5V/9V/12V/15V/20V, 3.25A Max (PD 65W)
	3*USB-A	5V3A / 9V2A / 12V1.5A (QC 3.0)
	2*DC5521	13.6V 8A
	1*Cigarette Lighter	13.6V 8A
	LEDs	3W Max
DC efficiency	≥92%	
AC output waveform	Pure breast	
Rated AC power	500W	
AC efficiency	≥90%	
AC output	EU standard 2*AC Power Socket	AC 220-240V~ 50Hz Rated power: 500W
Protection from overload	630W±50W 1 minute delay	
Peak power	1000W	

Solar input voltage	12-30V	Max.120W
DC input	DC charging port	17V 7A, Max.120W(DC7909)
	Type-C charging	20V 3.25A(PD 65W)

Cell type	LiCoMnNiO2
Cellular model	18650
Mode composed of cells	4S15P
Battery voltage	14.4V
Life cycles	> 3000

Temperature	0~45°C
Humidity	No condensation at 20-90% humidity
Storage temperature	- 10~45°C (interval)(stock stay indoors at the same time normal perature)
Autonomy	Recharge or gno 3 months

SAS.ULTIMATRON FRANCE

60 Avenue de l'industrie 34820 Teyran

info@ultimatron-france.fr

+ 33(0)9 50 42 76 17

