


The 3-phase Hybrid

UNIQUE IN
ITS **FAST**
INSTALLATION

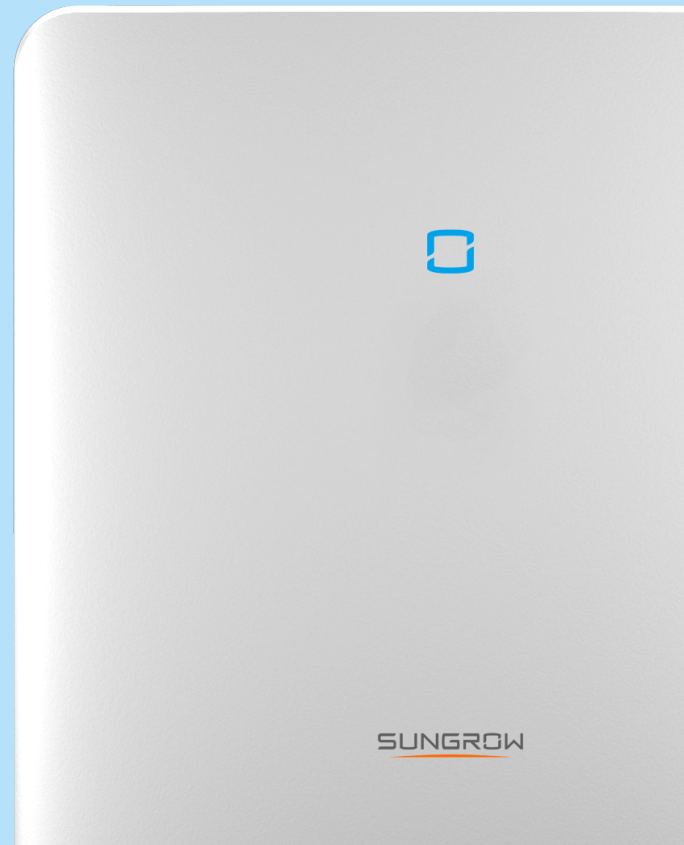

EXTERNAL CONNECTORS

No need to open the inverter, resulting in a less time-consuming installation.



GENEROUS CONNECTION AREA

More space for all connectors thanks to a clean and easy to access connection panel.



INTEGRATED SPIRIT LEVEL

More fun mounting the inverter on the wall. Always in balance, making a good impression.

FOR ALL. WHO WANT MORE.



MORE ENERGY SECURITY

Integrated emergency power function for a seamless change into battery operation with real 3-phase stand-alone network.

MORE INDEPENDENCE

No compromises needed. Network-independent thanks to stand-alone supply, if necessary, all year long.

MORE PLANNING SECURITY

A heat pump can easily be connected to the new 3-phase hybrid, thanks to SG-Ready function.

MORE COMFORT

20% of additional power for 5 minutes. For more security of supply and less blown fuses at home.

MORE FLEXIBILITY

Capable of supporting fully unbalanced loads. With three independent phases, a blackout won't cause headaches anymore.

MORE SMART HOME

Convenient use of solar energy. Charging the electric vehicle* and raising the internal consumption and increasing transparency.

[LEARN MORE AT WWW.SUNGROWPOWER.COM](http://WWW.SUNGROWPOWER.COM)

MORE HARD FACTS.

SH5.0RT/SH6.0RT/SH8.0RT/SH10RT

Type designation	SH5.0RT	SH6.0RT	SH8.0RT	SH10RT
PV Input				
Max. PV input power	7500 W	9000 W	12000 W	15000 W
Max. PV input voltage			1000 V	
Startup voltage	180 V	250 V	250 V	250 V
Nominal input voltage			600 V	
MPP voltage range	150 V - 950 V	200 V - 950 V	200 V - 950 V	200 V - 950 V
MPP voltage range for nominal power	210 V - 850 V	250 V - 850 V	330 V - 850 V	280 V - 850 V
No. of MPPTs			2	
Max. number of PV strings per MPPT	1/1	1/1	1/1	1/2
Max. PV input current			25 A (12.5 A / 12.5 A)	
Max. current for input connector			16 A	
Short-circuit current of PV input	32 A (16 A / 16 A)	32 A (16 A / 16 A)	32 A (16 A / 16 A)	48 A (16 A / 32 A)
AC Input and Output				
Nominal AC output power	5000 W	6000 W	8000 W	10000 W
Nominal AC output current	7.3 A	8.7 A	11.6 A	14.5 A
Max. AC output apparent power	5000 VA	6000 VA	8000 VA	10000 VA
Max. AC output current	7.6 A	9.1 A	12.1 A	15.2 A
Nominal AC voltage		3 / N / PE, 220 / 380 V; 230 / 400 V; 240 / 415 V		
AC voltage range		270 - 480 V		
Nominal grid frequency / Grid frequency range		50 Hz / 45 - 55 Hz, 60 Hz / 55 - 65 Hz		
THD		<3 % (of nominal power)		
DC current injection		<0.5 % I _n		
Power factor		>0.99 / 0.8 leading to 0.8 lagging		
Protection				
LVRT			Yes	
Anti-islanding protection			Yes	
AC short circuit protection			Yes	
Leakage current protection			Yes	
DC switch (solar)			Yes	
DC fuse (battery)			Yes	
Overvoltage category			III [MAINS], II [PV] [BATTERY]	
SPD			DC Type II / AC Type II	
Battery Data				
Battery type			Li-ion battery	
Battery voltage			150 V - 600 V	
Max charge / discharge current			30 A* / 30 A*	
Max charge / discharge power	7500 W / 6000 W	9000 W / 7200 W	10600 W / 10600 W	10600 W / 10600 W
System Data				
Max. efficiency	98.0%	98.2%	98.4%	98.4%
European efficiency	97.2%	97.5%	97.9%	97.9%
Isolation method (solar / battery)			Transformerless / Transformerless	
Ingress protection rating			IP65	
Operating ambient temperature range			-25 °C - 60 °C	
Allowable relative humidity range (non-condensing)			0% - 100%	
Cooling method			Natural convection	
Max. operating altitude			4000 m (>3000 m derating)	
Noise (Typical)			30dB (A)	
Display			LED	
Communication			RS485, WLAN, Ethernet, CAN, 4×DI, 1×DO	
DC connection type			MC4 (PV) / Sunclix (Battery)	
AC connection type			Plug and play connector	
Compliance			IEC / EN 62109-1, IEC / EN 62109-2, IEC / EN 61000-6-1, IEC / EN 61000-6-3, IEC / EN 61000-3, EN 62477-1, VDE-AR-N-4105, AS / NZS 4777.2	
Mechanical Data				
Dimensions (W * H * D)			460 * 540 * 170 mm	
Mounting method			Wall-mounting bracket	
Weight			27 kg	
Backup Data				
Nominal voltage			3 / N / PE, 220 Vac / 230 Vac / 240 Vac	
Frequency range			50Hz / 60Hz	
Total harmonic factor output voltage			2%	
Switch time to emergency mode			< 20ms	
Nominal output power	5000 W / 5000 VA	6000 W / 6000 VA	8000 W / 8000 VA	10000 W / 10000 VA
Peak output power	6000 W / 6000 VA, 5 min 10000 W / 10000 VA, 10 s	7200 W / 7200 VA, 5 min 10000 W / 10000 VA, 10 s	12000 W / 12000 VA, 5 min	12000 W / 12000 VA, 5 min
Parallel operation			Yes / 2	

* Depending on the connected battery